

HEAVY STEEL GRIDS


BFAG.net® steel grids

Highest safety level ensured by:

- > large base area of the feet
- > feet reinforced by clamp strap
- > fully welded pipes, fully galvanized
- > barriers can be unlocked and connected only at an angle of 45 degrees
- > no sharp feet due to square pipes
- > no pipe spacing more than 120 mm
- > no sharp points in upward direction during transport

Advantages of the BFAG.net® barriers:

- > low stacking width of 33 mm due to square pipe feet
- > barriers can be assembled in any position due to the asymmetrical arrangement
- > room for company logo 120 mm x 100 mm
- > fully welded pipes and clamp straps of the feet provide highest stability
- > height 1,100 mm, length 2,228 mm including the hooks and eyes

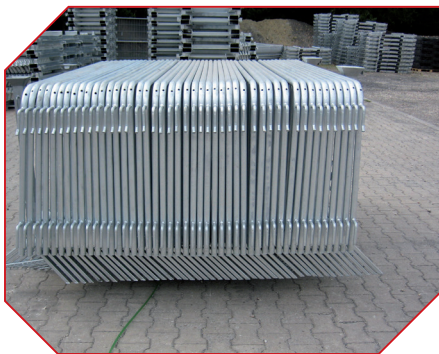

BFAG.net® steel barriers assembled closely together



46 BFAG.net® barriers on the STG 35 pallet



Galvanized barrier (zinc boreholes)

GATE BARRIERS

BFAG.net® gate barriers



Barrier with base plate steel gate

- > 2 channels
- > closable openings using hinged doors



The BFAG.net® barriers as sliding gate

Several barriers can be moved by one person when the barriers have been mounted and have rollers.


durable - portable - sturdy

Producer: H.M.R. Handels GmbH
Gutenbergstraße 1, D-59174 Kamen

Telephone: +49 (0) 2307 - 994860
Fax: +49 (0) 2307 - 994862
Email: info@hmr-gmbh.com
Website: www.hmr-gmbh.com